


# FAA Lighting F & G Towers

FAA F and G tower types are marked with white lights for day and red lights for night under FAA AC 70/7460-1L.

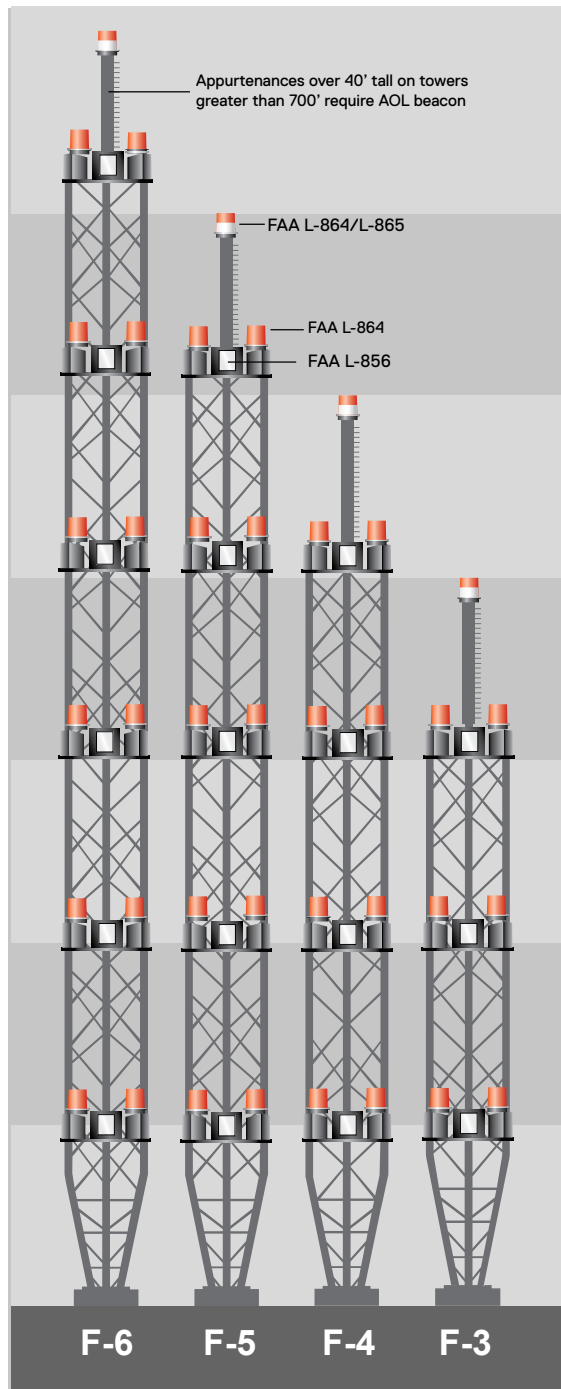

## F-6

- Over 1750' excluding any appurtenances
- 1 L-864/L-865 AOL dual medium intensity beacon
- 12 L-864 red beacons
- 18 L-856 high intensity beacons

## F-5

- Over 1400' but not more than 1750' excluding any appurtenances
- 1 L-864/L-865 AOL dual medium intensity beacon
- 10 L-864 red beacons
- 15 L-856 high intensity beacons

## F-4

- Over 1050' but not more than 1400' excluding any appurtenances
- 1 L-864/L-865 AOL dual medium intensity beacon
- 8 L-864 red beacons
- 12 L-856 high intensity beacons

## F-3

- Over 700' but not more than 1050' excluding any appurtenances
- 1 L-864/L-865 AOL dual medium intensity beacon
- 6 L-864 red beacons

G towers do not have appurtenances greater than 40 ft., therefore no AOL beacon is required.